



REV	DESCRIPTION	BY	CHK	DATE	ECN / MPS
A	ENGINEERING RELEASE	JGS	AH	2/12/05	M63978
B	DIMENSION 27.8 CORRECTED	AB	IK	03/19/12	M85110
C	REPLACED CORE TUBE ASSEMBLY	MBK	VKN	08/20/14	0101003

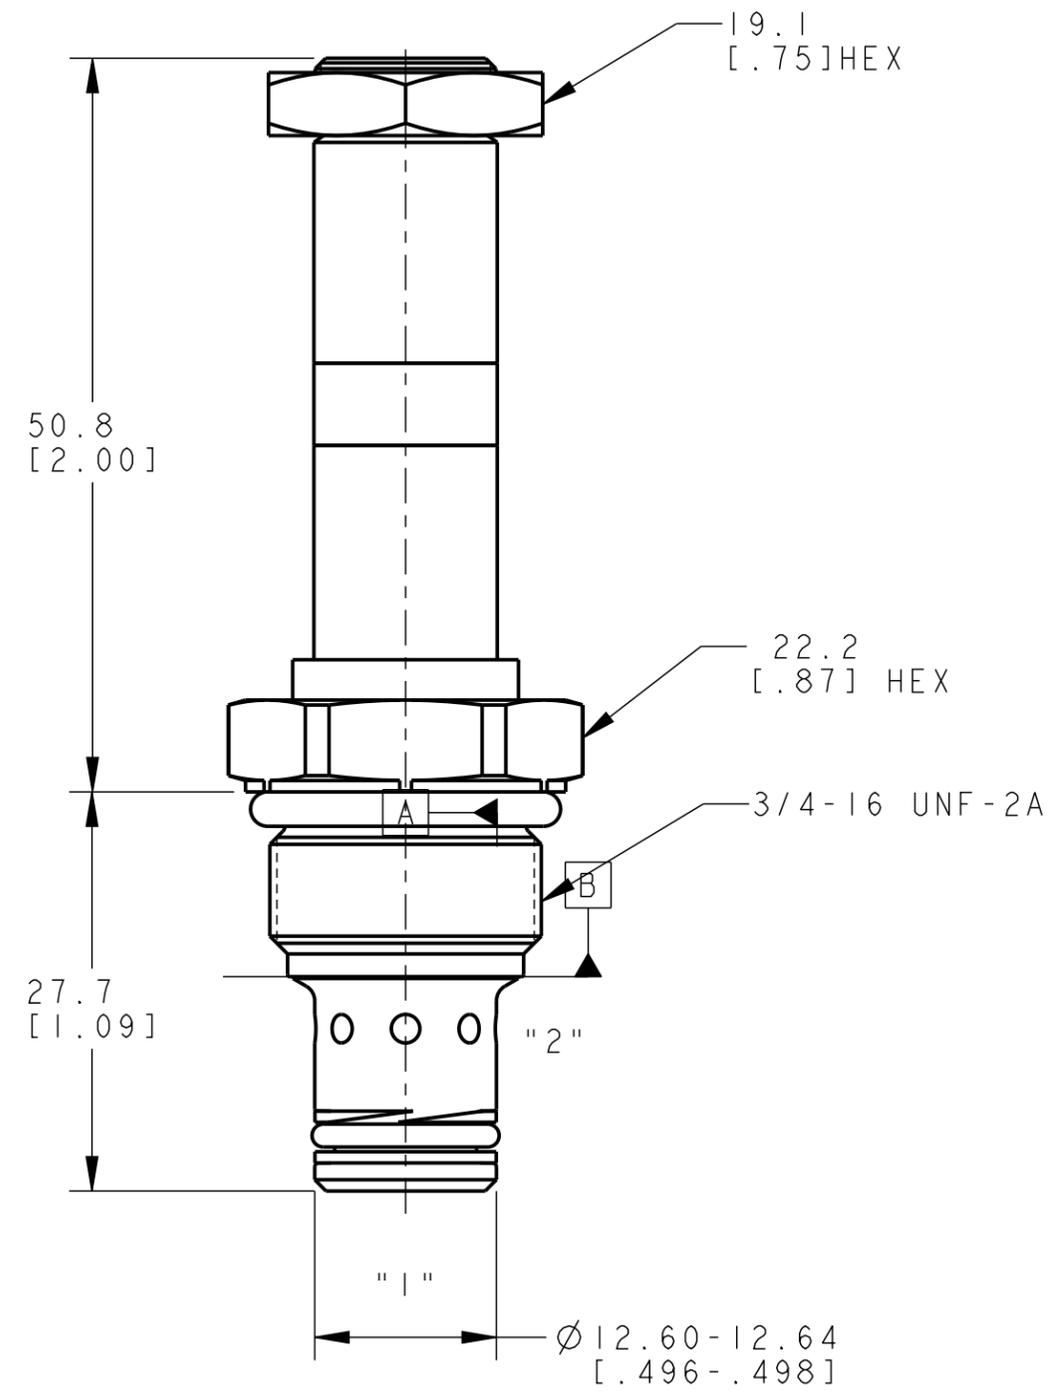

HYDRAULIC SYMBOL

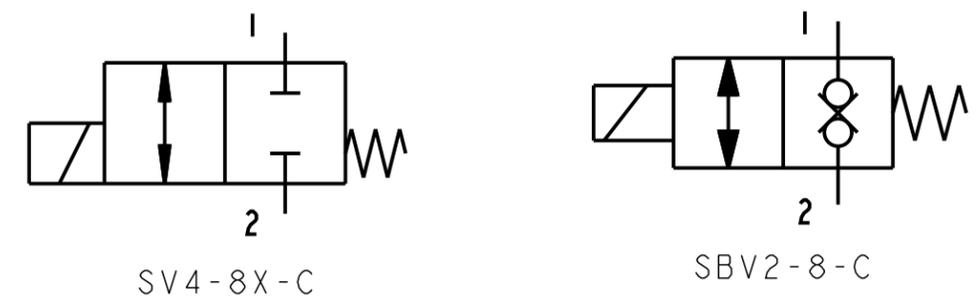

- NOTE:
- 1 USE VALVE CAVITY C-8-2
 - 2 NET WEIGHT:
CARTRIDGE ONLY: .09 kg [.21 lb]
CARTRIDGE W/COIL: .27 kg [.60 lb]
CARTRIDGE W/COIL AND ALUMINUM BODY: .54 kg [1.2 lb]
 - 3 TORQUE INTO CAVITY 34-41 N.m [25-30 lbf.ft]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES <input type="checkbox"/> MILLIMETERS (INCHES) <input checked="" type="checkbox"/>	DRAWING BASED ON ANSI Y14.5M-2009	
	THE REPRODUCTION, DISTRIBUTION, AND UTILIZATION OF THIS DOCUMENT, AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL, OR DESIGN. (PER ISO 16016)	
TOLERANCES .X ± .XX ± .XXX ± ∠ ±	DRAWN JGS BY/DATE 6/4/03	MATERIAL/HEAT TREAT
	CHECKED LMD BY/DATE 8/4/03	
UNSPECIFIED RADII ARE: ----	ENGRG BY/DATE	TITLE
	METALLURGY BY/DATE	SV4-8X-C/SBV2-8-C SOLENOID VALVE INSTALLATION DRAWING
UNSPECIFIED DRAFT ANGLES ARE: -----°	THIRD ANGLE PROJECTION	MICROINCHES <input type="checkbox"/> MICROMETERS (MICROINCHES) <input checked="" type="checkbox"/>
		NUMBER A-2416-001
B SIZE	DO NOT SCALE	SCALE 2/1 SHEET 1 OF 1

